

When replacing blades, be sure to mount them securely. Be sure to replace the components as shown in figure 3. Tighten the blade mounting bolt, using blade wrench to hold sheave, until cup washers are drawn tight against blade bushing.

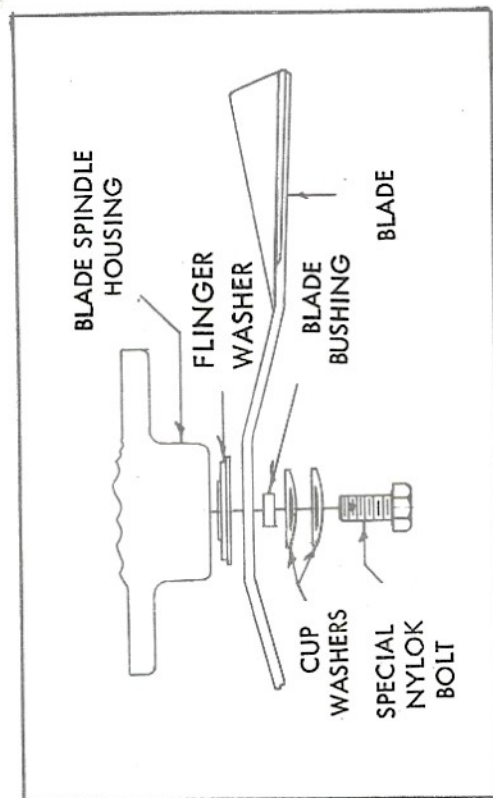


Figure 3